

# Roblon Polyester Ripcord

**Roblon Polyester Ripcords for easy removal of the cable jacket.**


Roblon Polyester Ripcords can be used in almost any type of cable, allowing easy access to the cable core during installation or maintenance works. Due to the high quality of twisting, the Roblon polyester ripcord is even able to cut through some corrugated steel tapes.

Roblon Ripcords are also available in water-blocking (WB) versions. They are impregnated with water-blocking solutions which prevent the water from traveling along the ripcord, should water penetrate the cable jacket.

- Excellent cutting properties
- High and uniform cord quality
- Easy to trace
- Available in WB versions
- Available in coloured versions

Roblon Polyester Ripcord

Roblon Polyester Ripcord

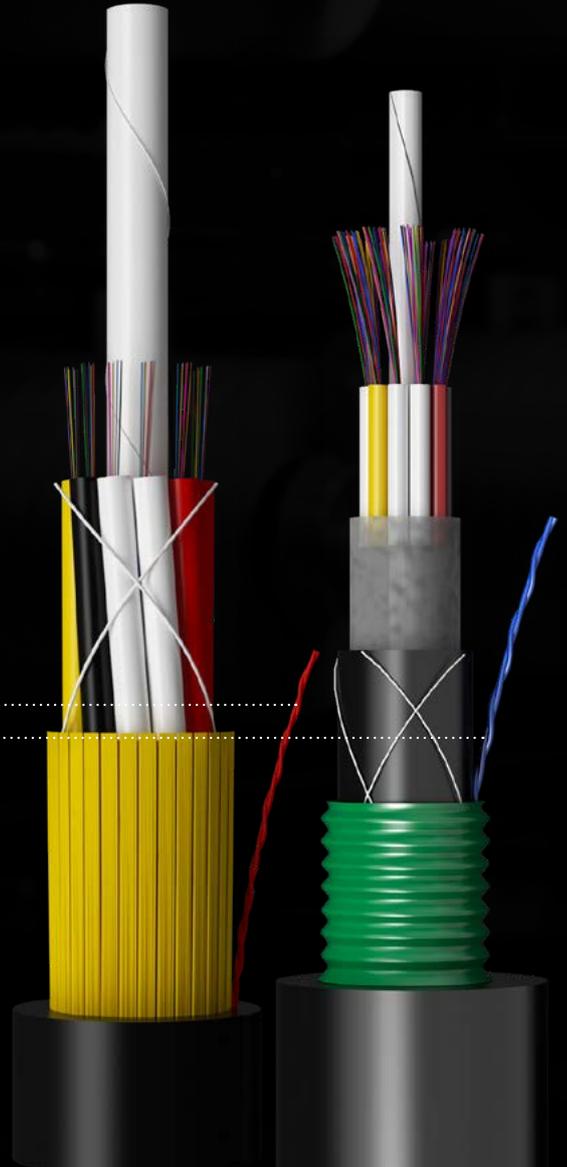

COLOURED VERSIONS



WATER BLOCKING



SMOOTH NO DUST

Polyester Ripcord from Roblon may cut corrugated steel tape and other metal foils.



14.02.2024

**Roblon**


The data in this technical data sheet is provided for informational purpose only and does not constitute a specification. The latest update of the datasheet is always available on [www.roblon.com](http://www.roblon.com)

[info@roblon.com](mailto:info@roblon.com)

[www.roblon.com](http://www.roblon.com)

Properties	Meter weight	Runnage	Break Strength	Elongation
Unit	g/m	m/kg	N	%
<b>1100 dTex LS</b>				
Nom.	0.110	9091	70	
Min.	0.099	8264	65	
Max.	0.121	10101		30
<b>1670 dTex LS</b>				
Nom.	0.170	5882	105	
Min.	0.153	5348	95	
Max.	0.187	6536		30
<b>2200 dTex LS</b>				
Nom.	0.220	4545	140	
Min.	0.198	4132	125	
Max.	0.242	5051		30
<b>3300 dTex LS</b>				
Nom.	0.345	2899	220	
Min.	0.311	2635	200	
Max.	0.380	3221		30
<b>3*1670 dTex LS (5010)</b>				
Nom.	0.500	2000	315	
Min.	0.450	1818	290	
Max.	0.550	2222		30
<b>3*2200 dTex LS (6600)</b>				
Nom.	0.665	1504	395	
Min.	0.599	1367	380	
Max.	0.732	1671		30

**Breaking strength: 1670 dTex (example)**

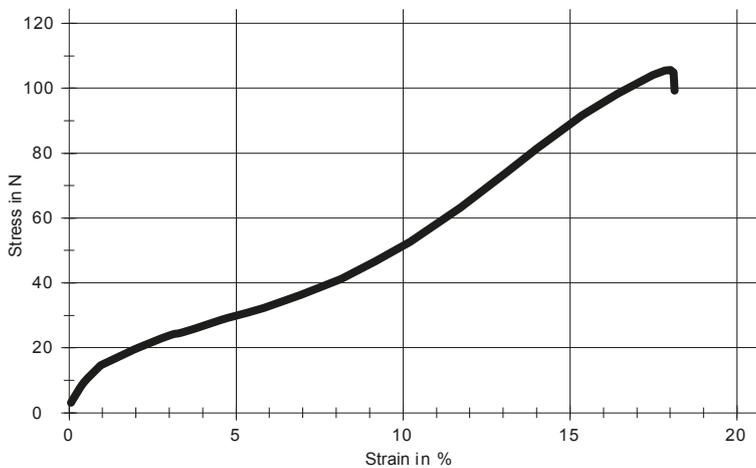

Polyester Ripcord from Roblon may cut corrugated steel tape and other metal foils.

