

ACCUMLULATOR

Roblon ACC1400

Roblon ACC1400 accumulator

Integrates with twisters and extruders to create in-line twisting system

Can be integrated with take-up winders if yarn is to be cooled, softened or dried pre-winding

For monofilaments

For tape

For danline


For products in 5,000-100,000 denier range

Key features

- Easy to maintain
- Simple, robust design
- Overrun protection
- Constant in-feed tension as pulsations are absorbed during unwinding

Standard equipment

- System for preventing overrun when twister or winder stops
- 'Dancing arm' for absorbing pulsations
- Warning signal upon yarn break
- Warning signal in event of overflow

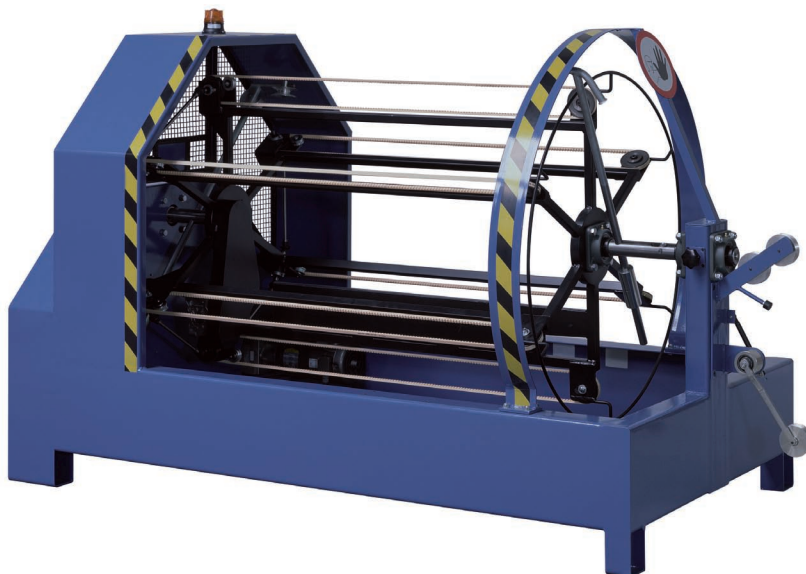

Roblon

Kjeldgaardsvej 6 · 9300 Saeby · Denmark
Tel: +45 9846 4000 · Fax: +45 9846 7820
eng@roblon.com · www.roblon.com

v3.0
01.09.2007

ACCUMLULATOR

Roblon ACC1400

Optional equipment

- Fan for cooling or drying yarns and filaments
- Gears for changing pitch

Technical data

| | |
|----------------|------------------------|
| Yarn: | 5,000-100,000 denier |
| Yarn capacity: | Max. 1,400 m |
| Feeding speed: | 0-max. 200 m/min. |
| Motor: | Inverter drive 0.55 kW |
| Voltage: | As required |

