



## Roblon Flex Strap

Aramid strap for strapping such as riser fins, piggybacking, VIV strakes etc. Designed for multi-purpose use.

### Key features:

- > Quick and easy to install
  - > Flexible system
  - > Excellent creep properties
  - > Maintains tension
  - > Temperature stability up to 75°C (167°F)
  - > Different tension devices available
  - > Lightweight
  - > Almost neutrally buoyant
  - > No sharp edges
  - > Sea water lifetime > 30 years
  - > EAA coating protects the strapped material
- 
- > Test certificate supplied
  - > In-house test facilities available
  - > Tension devices can be supplied on request



## Roblon Flex Strap

### Technical data

Min. breaking strength (kN)	Width (mm)	Width (inches)	Thickness (mm)	Thickness (inches)	
25	40 ± 0.5	1.57 ± 0.02	2.7 ± 0.2	0.105 ± 0.008	
50	40 ± 0.5	1.57 ± 0.02	5.4 ± 0.4	0.213 ± 0.016	X
50	60 ± 0.5	2.36 ± 0.02	2.95 ± 0.2	0.116 ± 0.008	
100	60 ± 0.5	2.36 ± 0.02	5.9 ± 0.4	0.232 ± 0.016	X

Fibre content: 19-27%      Minimum circumference: 1800 mm (71") when used in continuous loop

X = continous loop. Other straps are single tape straps.

Continuous loop




Single-tape strap with an eye in each end



Flex Straps can be assembled using either a double-bolt tension device or a ratchet tension device

Double bolt

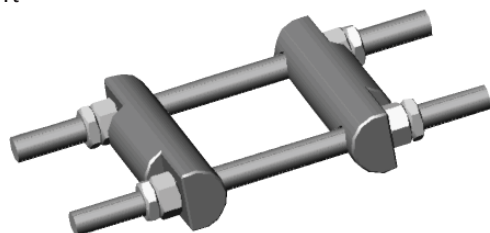

Ratchet

