


## Roblon Ripcord

PREVIOUSLY KNOWN AS 'ROBLON POLYESTER RIPCORD' AND 'ROBLON ARAMID RIPCORD'

*Roblon Ripcord is made of polyester or aramid, used for easy removal of the cable jacket.*

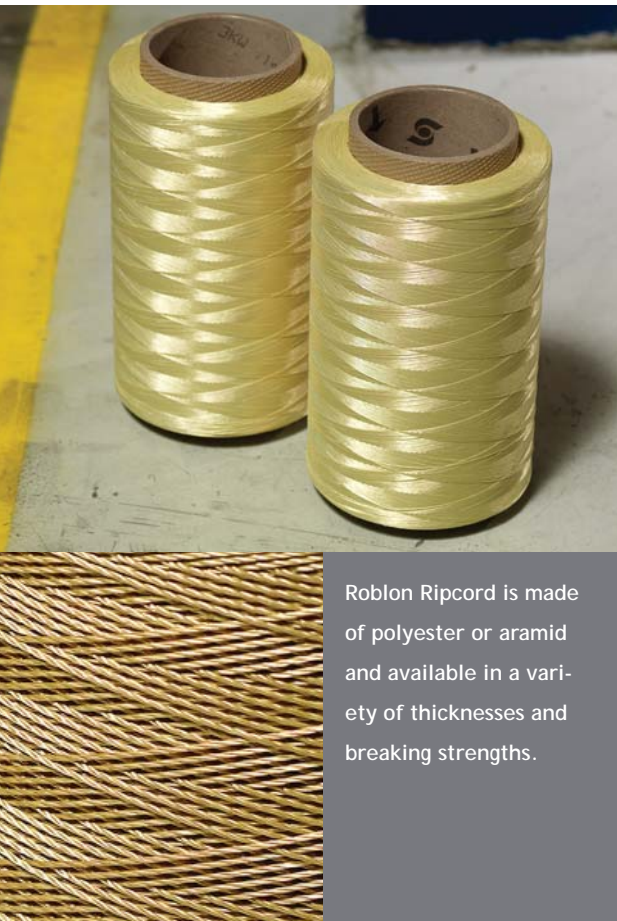

Roblon Ripcord is made of polyester or aramid and available in a variety of thicknesses and breaking strengths.



- > Polyester and aramid types
- > Excellent cutting properties
- > High and uniform cord quality
- > Easy to trace
- > Customised versions available
- > Simple processing directly from spools

Roblon ripcords can be used in almost any type of cable, providing easy access to the cable core during installation or maintenance. Due to the high quality of the twisting, Roblon polyester ripcord can cut through some corrugated steel tapes. Roblon supply customised types and lengths to cable manufacturers world-wide.

Polyester Ripcord from Roblon may cut corrugated steel tape and other metal foils.

## Roblon Ripcord


PREVIOUSLY KNOWN AS 'ROBLON POLYESTER RIPCORD' AND 'ROBLON ARAMID RIPCORD'

Property	unit	test method	Polyester Ripcord black/white			Aramid Ripcord		
			3x1100 dtex	3x1670 dtex	3x2200 dtex	1680 dtex	3220 dtex	5040 dtex
Metre weight	g/m	ASTM D 885	0.35	0.54	0.69	0.168	0.322	0.504
Runnage	m/kg	ASTM D 885	2860	1851	1449	5952	3105	1984
Diameter	mm	Roblon method	0.6	0.8	0.9	0.4	0.6	0.8
Area	mm <sup>3</sup>	Roblon method	0.3	0.5	0.6	0.2	0.3	0.4
Breaking strength	N	ASTM D 885	225	325	425	300	575	880
Elongation at break	%	ASTM D 885	12%	16%	12%	2.5%	2.5%	2.5%

Standard spool specifications	unit	tolerance	94x273 spools	94x290 spools
Inner diameter	mm	0.2 mm	94	94
Length	mm	0.3 mm	273	290
Traverse	mm	0.1 mm	250	250

Standard packing information	unit	Polyester	Aramid
		120x80 pallets	100x100 pallets
Spools per pallet (traverse 250 mm)	spools	39 or 52	72-96
Pallet length	cm	120	100
Pallet width	cm	80	100
Pallet height	cm	100 to 110	100 to 110

### Spool specifications

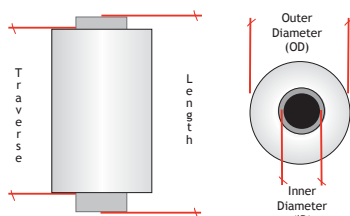

### Packing information

